


SYSTEM DATA SHEET

“ROOF GARDEN”

WITH STABILODRAIN® SD 30

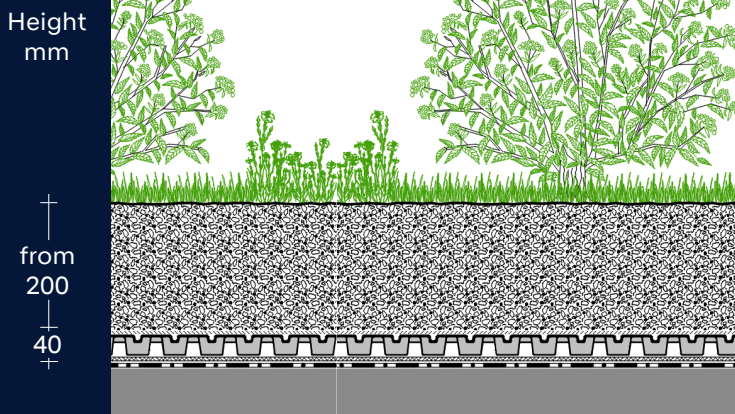

Build-up height:	from ca. 240 mm
Weight, at max. water capacity:	from ca. 315 kg/m ²
Water storage capacity:	from ca. 111 l/m ²

SYSTEM BUILD-UP

Lawn, perennials, with deeper substrate layers also shrubs and small trees

System Substrate “Roof Garden”

Zincolit® Plus,
if total substrate depth ≥ 350 mm

Filter Sheet TG
Stabilodrain® SD 30
Protection Mat ISM 50

Roof construction with root resistant waterproofing

DESCRIPTION/COMMENTS:

- Extremely stable drainage and water storage element made of thermoformed polystyrene.
- Special connecting studs along the longitudinal board's edges allow for an interlocking of single SD 30 elements.
- In green areas the SD 30 is installed with its studs facing down, the water storage capacity then is approx. 7.5 l/m².
- The system build-up can also be used on roofs with puddles and on inverted roofs.
- Stabilodrain® SD 30 can also be used in walkways and driveways; then the drainage element is installed with its studs facing up. The infill volume between the studs is approx. 20 l/m².
- The drainage capacity meets the requirements of German Standard DIN 4095.
- Please note: the build-up described above is suitable for the moderate continental climate of Central Europe. For information on possible adaptations for other climates please contact the Zinco Technical Department.
- If waterproofing is not root resistant an additional root barrier is required: Root Barrier WSB 100-PO
- The indicated weights do not include the weight of the vegetation, see [Info Sheet Green Roof Ballast](#).

Zinco GmbH

Lise-Meitner-Strasse 2 | 72622 Nuertingen | Germany
Phone +49 7022 6003-0 | info@zinco-greenroof.com | www.zinco-greenroof.com

Subject to technical alterations and printing errors • First edition 12/2012; Revised 10/2024

